


ACT WATER FILTRATION SYSTEMS™

Advanced Cleaning Technology

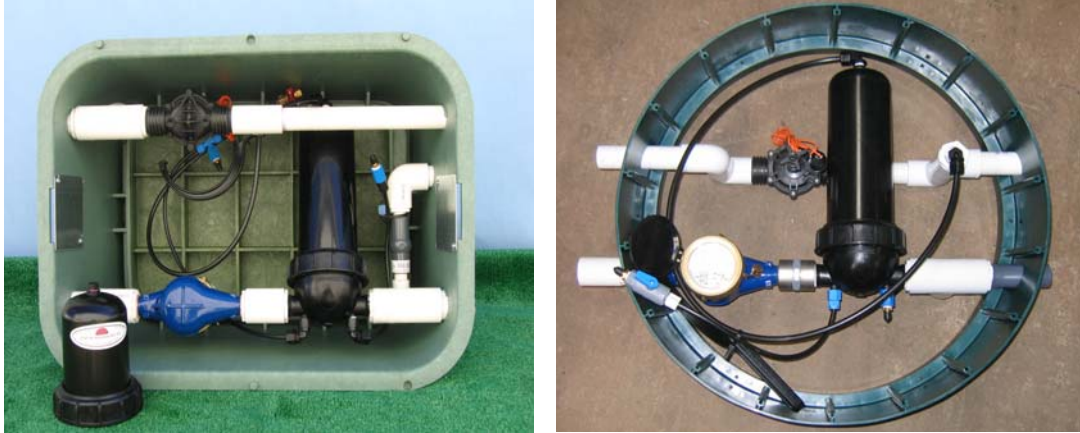

SF Filtration System for Wastewater Drip Dispersal

Product Advantages

- 3 dimensional filtration – not a screen
- Corrosion-free plastic filter and manifold
- Easy to install maintain and service
- Simple and reliable design
- Freeze protection available
- Uses proven **RING DISC FILTRATION TECHNOLOGY**.
- Filtration level easily changed by replacing disc rings with desired mesh size
- Use on single or multiple zones
- Minimal pressure loss vs. flow across filter
- Increased differential pressure does not affect level of filtration

Applications

- Ideally suited for Residential Subsurface Drip Irrigation or Spray

Water Sources

- Secondary treated wastewater

Specifications

Inlet: 1 ¼"
Outlet: 1 ¼"
Flush Return: 1" or 1 ¼"
Maximum Operating Pressure: 100 psi

Materials of Construction

Valves:

Nuts, bolts and washers: 304 Stainless Steel
Valve Body: Glass Reinforced Polyamide
Spring: Stainless Steel AISI 302
Diaphragm: Natural Rubber

Filter:

Modified 1" Super Manual Filter
Filter Body and Disc Spine: Reinforced Polyamide, PVC and Polycarbonate
Disc Rings: Polypropylene and Polyethylene (upon request)
O-Rings: EPDM Rubber

Options:

Automatic Field Flush
Field Flow Control
Pulsed Reed Switch output Flowmeter
Manual or Automatic Field Flush
Multiple Enclosure Options

ACT DISTRIBUTOR:
JNM TECHNOLOGIES, INC.
PO Box 5667
Bryan, TX 77805-5667
979-779-6500
979-779-6505 fax
jnm@jnmtechnologies.com

HEAD LOSS

1 – BLUE	(400 MICRON / 40 MESH)
2 – YELLOW	(200 MICRON / 80 MESH)
3 – RED	(130 MICRON / 120 MESH)
3 – BLACK	(100 MICRON / 140 MESH)
4 – GREEN	(55 MICRON)

